

# Кабели коаксиальные POMING JML-18006

## Технические характеристики


Архангельск (8182)63-90-72	Ижевск (3412)26-03-58	Магнитогорск (3519)55-03-13	Пермь (342)205-81-47	Сургут (3462)77-98-35
Астана (7172)727-132	Иркутск (395)279-98-46	Москва (495)268-04-70	Ростов-на-Дону (863)308-18-15	Тверь (4822)63-31-35
Астрахань (8512)99-46-04	Казань (843)206-01-48	Мурманск (8152)59-64-93	Рязань (4912)46-61-64	Томск (3822)98-41-53
Барнаул (3852)73-04-60	Калининград (4012)72-03-81	Набережные Челны (8552)20-53-41	Самара (846)206-03-16	Тула (4872)74-02-29
Белгород (4722)40-23-64	Калуга (4842)92-23-67	Нижний Новгород (831)429-08-12	Санкт-Петербург (812)309-46-40	Тюмень (3452)66-21-18
Брянск (4832)59-03-52	Кемерово (3842)65-04-62	Новокузнецк (3843)20-46-81	Саратов (845)249-38-78	Ульяновск (8422)24-23-59
Владивосток (423)249-28-31	Киров (8332)68-02-04	Новосибирск (383)227-86-73	Севастополь (8692)22-31-93	Уфа (347)229-48-12
Волгоград (844)278-03-48	Краснодар (861)203-40-90	Омск (3812)21-46-40	Симферополь (3652)67-13-56	Хабаровск (4212)92-98-04
Вологда (8172)26-41-59	Красноярск (391)204-63-61	Орел (4862)44-53-42	Смоленск (4812)29-41-54	Челябинск (351)202-03-61
Воронеж (473)204-51-73	Курск (4712)77-13-04	Оренбург (3532)37-68-04	Сочи (862)225-72-31	Череповец (8202)49-02-64
Екатеринбург (343)384-55-89	Липецк (4742)52-20-81	Пенза (8412)22-31-16	Ставрополь (8652)20-65-13	Ярославль (4852)69-52-93
Иваново (4932)77-34-06	Киргизия (996)312-96-26-47	Россия (495)268-04-70	Казахстан (772)734-952-31	

# JML-Cable-18006 series millimeter microwave test cable assembly

**Features:** DC to 26.5 GHz, three-layer shielding structure, good stable amplitude, stable phase index, stable performance, reliable and durable

**Typical applications:** signal transmission in communication equipment, laboratory testing, production line testing and other areas of radio frequency microwave.

## Technical Parameters

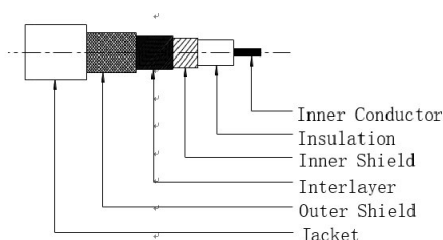

### Structure

**Inner Conductor:** Stranded Silver Plated Copper

**Insulation:** LD-PTFE

**Inner Shield:** Silver Plated Copper Strip

**Interlayer:** LD-PTFE

**Outer Shield:** Silver Plated Copper Wire

**Jacket:** PUR



Mechanical Characteristics				
Dimension	mm	inch		
Inner Conductor	1.02	0.040		
Insulation	3.07	0.121		
Inner Shield	3.27	0.129		
Interlayer	3.47	0.137		
Outer Shield	3.80	0.150		
Jacket	5.20	0.205		
Weight	0.065kg/m			
Min Bending Radius	(Dynamic 52.0mm), (Static 25.0mm)			
Insertion/Withdrawal	>5000			
Operating Temperature	-55°C~+85°C			
Electrical Characteristics				
VSWR Max		6GHz	18GHz	26.5GHz
	SMA、3.5mm	1.15:1	1.25:1	1.30:1
	N	1.15:1	1.25:1	---
	TNC	1.15:1	1.30:1	---
Impedance	50 ohms			
Velocity of Propagation	76%			
Screening Effectiveness	>90 dB			
Amplitude Change VS Bending	$\leq \pm 0.03\text{dB}@26.5\text{GHz}$			
Phase Change VS Bending	$\leq \pm 2.7^\circ @26.5\text{GHz}$			
Attenuation(25°C)				
Frequency (MHz)	dB/100ft	dB/100m		
1000	10.7	35		
3000	20.7	68		
6000	28.7	94		
10000	42.4	139		
12000	45.1	148		
18000	53.6	176		
26500	68.6	225		
Power handling(25°C, Sea Level, Cable)				
Frequency (MHz)	Watts			
1000	149			
3000	85			
6000	55			
10000	41			
12000	37			
18000	29			
26500	23			

Архангельск (8182)63-90-72  
Астана (7172)727-132  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89  
Иваново (4932)77-34-06

Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Липецк (4742)52-20-81  
Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Россия (495)268-04-70

Пермь (342)205-81-47  
Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Казахстан (772)734-952-31

Сургут (3462)77-98-35  
Тверь (4822)63-31-35  
Томск (3822)98-41-53  
Тула (4872)74-02-29  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Ярославль (4852)69-52-93