

Кабели коаксиальные POMING JML-18009

Технические характеристики

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Россия (495)268-04-70

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Казахстан (772)734-952-31


Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

JML-Cable-18009 series millimeter microwave test cable assembly

Features: DC to 50GHz, three-layer shielding structure, with good stable amplitude, stable phase, stable performance, and reliable resistance

Typical applications: signal transmission in communication equipment, laboratory testing, production line testing and other areas of radio frequency microwave.

Technical Parameters

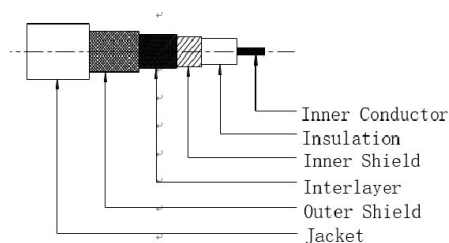

Structure

Inner Conductor: Silver Plated Copper


Insulation: LD-PTFE

Inner Shield: Silver Plated Copper Strip

Interlayer: LD-PTFE

Outer Shield: Silver Plated Copper Wire

Jacket: FEP

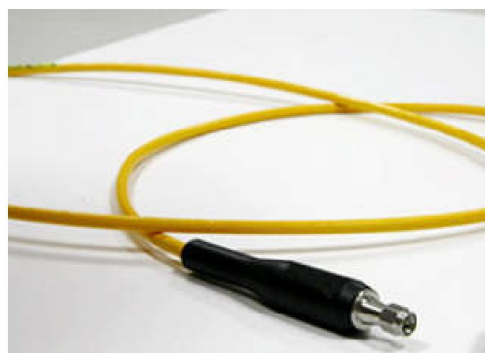

Mechanical Characteristics					
Dimension	mm	inch			
Inner Conductor	0.72	0.028			
Insulation	2.21	0.087			
Inner Shield	2.38	0.094			
Interlayer	2.68	0.106			
Outer Shield	3.14	0.124			
Jacket	3.60	0.142			
Weight	0.034kg/m				
Min Bending Radius	(Dynamic 36.0mm), (Static 14.4mm)				
Insertion/Withdrawal	>5000				
Operating Temperature	-55°C~+125°C				
Electrical Characteristics					
VSWR Max		18GHz	26.5GHz	40GHz	50GHz
	2.92mm	1.25:1	1.30:1	1.30:1	—
	2.4mm	1.25:1	1.30:1	1.30:1	1.35:1
Impedance	50 ohms				
Velocity of Propagation	76%				
Screening Effectiveness	>90 dB				
Amplitude Change VS Bending	≤±0.05dB@50GHz				
Phase Change VS Bending	≤±5° @50GHz				
Attenuation(25°C)					
Frequency (MHz)	dB/100ft		dB/100m		
1000	13.4		43.8		
3000	23.3		76.4		
6000	33.2		108.8		
12000	48.2		158.1		
18000	58.5		191.8		
26500	71.6		234.8		
40000	88.9		291.7		
50000	100.2		328.5		
Power handling(25°C, Sea Level, Cable)					
Frequency (GHz)	Watts				
1000	250				
3000	140				
6000	130				
12000	80				
18000	72				
26500	66				
40000	60				
50000	56				

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Россия (495)268-04-70

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Казахстан (772)734-952-31

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93